

### REMARKS

Claims 1-25 were pending in the application. The Examiner rejected and objected to claims 1-25 for various reasons, all of which are addressed below. Additionally, the Examiner made formal objections to the format of the abstract and the drawings. The Examiner also indicated that certain claims would be allowed if rewritten.

In response to the Examiner's rejections and objections, Applicants have cancelled claims 1-25. Applicants also have amended the abstract and specification and have attached a substitute abstract and specification to this Response. Additionally, Applicants submit a new Figure 1 with this Response, incorporating the Examiner's suggested changes. Finally, in response to the Examiner's allowances for rewritten claims, Applicants have rewritten some original claims and introduced them as new claims.

### Allowable Subject Matter

The Examiner determined that claims 6, 12-15, 18-19, and 24 would be allowable if rewritten to overcome the Examiner's rejections under 35 U.S.C. § 112, second paragraph and to include all of the limitations of the base claim and any intervening claims. Applicants have rewritten the claims in accordance with the Examiner's suggestions. For the Examiner's convenience, Applicants list below the relationships between the new, rewritten claims and the original claims:

New claim 32 is based on original claim 6.

New claim 36 is based on original claim 12.

New claim 46 is based on original claim 14.

New claim 55 is based on original claim 15.

New claim 63 is based on original claim 18.

New claim 71 is based on original claim 19.

Furthermore, Applicants have added new independent claim 26, which includes all of the features of original claims 1, 7 and 12.

All of the remaining new claims are dependent claims. These new dependent claims only recite features present in the original dependent claims that were already subject to examination.

#### **Claim Rejections – 35 U.S.C. § 112**

The Examiner rejected claims 1-25 under 35 U.S.C. § 112, second paragraph. Applicants have cancelled claims 1-25. Additionally, in the new claims, Applicants have incorporated the relevant § 112 changes suggested by the Examiner.

#### **Claim Rejections – 35 U.S.C. § 103**

The Examiner rejected claims 1-5, 7-11, 16, and 20-23 under U.S.C. § 103(a) as being unpatentable over Grüner et al. (US Patent No. 5,065,341) and Buckley (US Patent No. 4,739,346). Applicants have cancelled these claims to promote issuance of the allowable subject matter.

The Examiner rejected claims 17 and 25 under 35 U.S.C. § 103(a) as being unpatentable over Grüner et al. (US Patent No. 5,065,341) and Buckley (US Patent No. 4,739,346), further in view of McCarthy (US Patent No. 4,042,077). As mentioned above, Applicants have cancelled claims 17 and 25 to promote issuance of the allowable subject matter.

#### **Claim Objections**

The Examiner objected to the language of claim 3 and suggested other language. Although Applicants have cancelled claim 3, Applicants have incorporated the Examiner's suggestion regarding claim 3 into the new dependent claims reciting features from claim 3.

Attached is a marked-up version of the changes being made by the current amendment.

Applicant : Philipp Jung et al.  
Serial No. : 10/054,828  
Filed : January 23, 2002  
Page : 11

Attorney's Docket No.: 02894-532001 / BAG 06388

Applicant asks that all claims be allowed. Enclosed is a \$858 check for excess claim fees and a \$110 check for the Petition for Extension of Time fee. Please apply any other charges or credits to Deposit Account No. 06-1050.

Respectfully submitted,

Date: November 11, 2002

  
James W. Babineau  
Reg. No. 42,276

Fish & Richardson P.C.  
225 Franklin Street  
Boston, Massachusetts 02110-2804  
Telephone: (617) 542-5070  
Facsimile: (617) 542-8906

20530118.doc

The PTO did not receive the following  
listed items: a check for \$858.00  
but we did receive \$110.00

Applicant : Philipp Jung et al.  
Serial No. : 10/054,828  
Filed : January 23, 2002  
Page : 12

Attorney's Docket No.: 02894-532001 / BAG 06388

**Version with markings to show changes made**

In the specification:

Please refer to the attached substitute specification for changes made in the specification.

In the claims:

Claims 1-25 have been cancelled.

In the abstract:

Please refer to the attached substitute abstract for changes made in the abstract.





Fig. 1



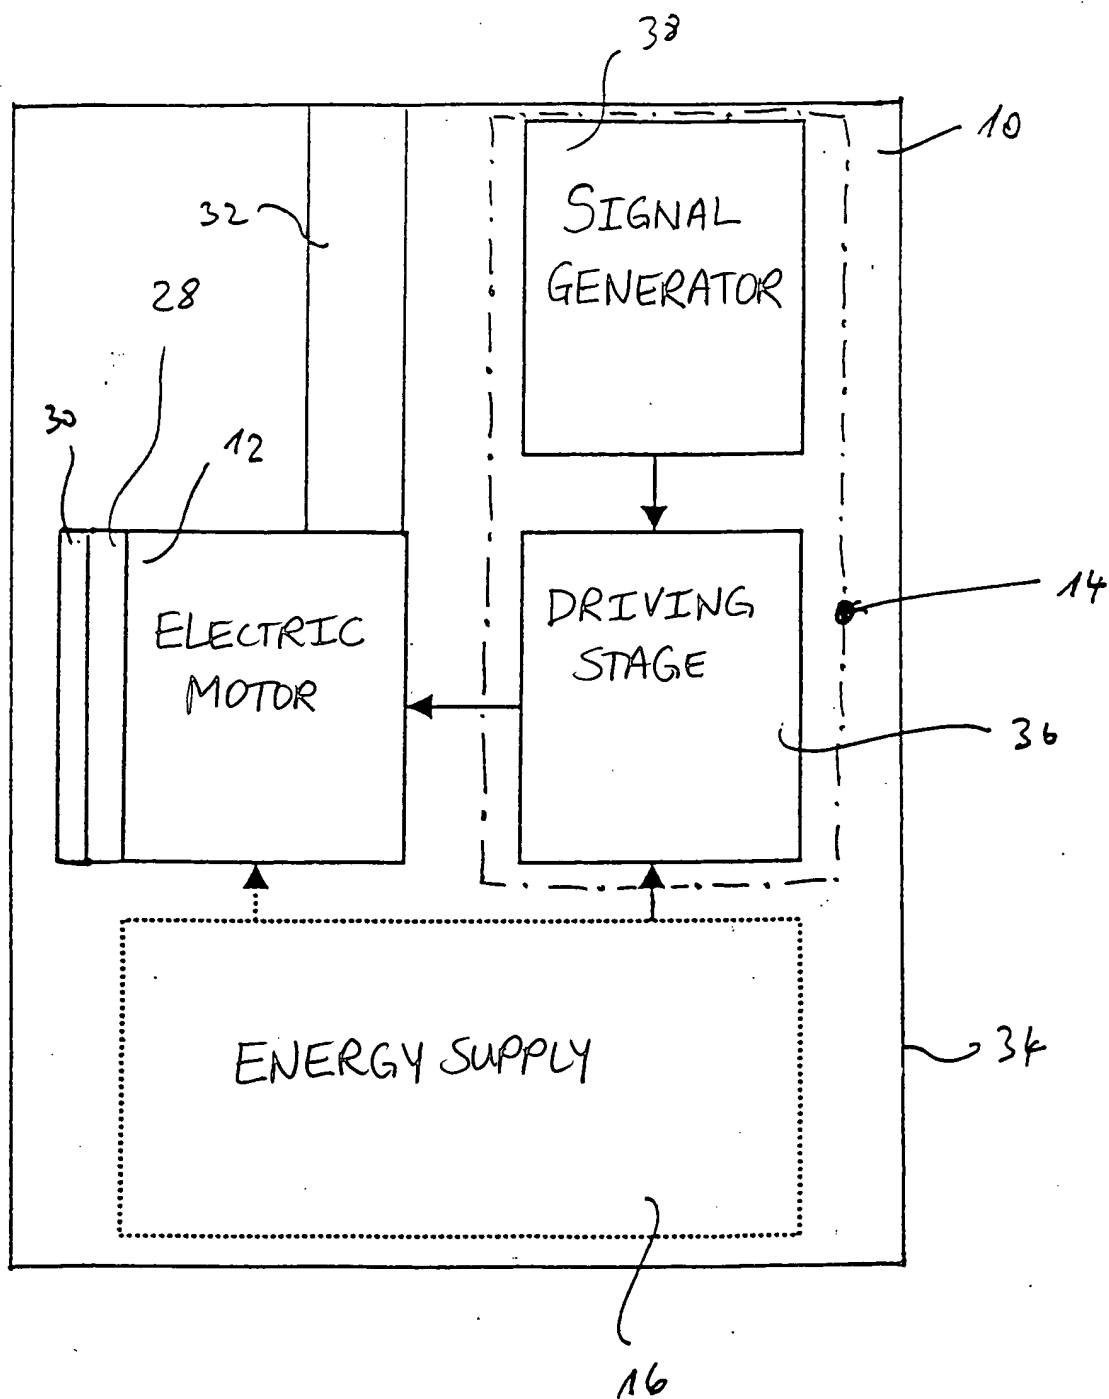

## Electric Motor Controlled as an Electroacoustic Transducer

### Technical Field

This invention relates to an appliance ~~of~~ for personal use such as a toothbrush, an oral irrigator, a shaver, or a kitchen machine, with ~~a driving mechanism constructed as an electric~~  
5 motor and ~~with~~ a control stage for the electric motor's energy supply.

### Background

Appliances of this type are in widespread use, the known appliances including, for example, appliances ~~of~~ for personal use such as electric toothbrushes, electric oral irrigators,  
10 electric shavers, and electric household and kitchen appliances or the like. Further known appliances of this type include office communication machines, electrically powered toys or the like. However, the present invention is not restricted in its application to the appliances mentioned but can be used in principle on any appliance that has an electric motor. In many cases there is a need to send information to the users of such appliances. For the  
15 transmission of information, the appliances often have separate built-in sound transmitters, light transmitters or some other transmitters of information; for example, toothbrushes are already known that have a type of loudspeaker as a transmitter of information, thus enabling the user to be informed, for instance, about the elapsed brushing time or similar time intervals. These sound transmitters can be constructed as dynamic, electrostatic,  
20 magnetostatic or piezo loudspeakers.

The disadvantage of the known appliances is, however, that an additional sound transmitter is required for an acoustic information transfer, which not only increases the manufacturing cost of the appliance but also takes up considerable space in the appliances.  
25 Furthermore, particularly with hermetically encapsulated appliances such as appliances with watertight housings, there is the problem of having to introduce measures that allow the sound waves generated in the interior of the appliance to reach the user.

### Summary

30 ~~By contrast, it is an~~ An object of the present invention is to further develop an

appliance with the features initially referred to such that it is possible, in an extremely simple and economical manner, to generate information signals, in particular user-perceptible, preferably audible signals.

5        ~~According to the present invention this object is essentially accomplished on the~~  
~~appliance with the features initially referred to in that, during~~ During off-periods of the  
electric motor, the control stage supplies the electric motor with an energy, ~~which is adapted~~  
~~in particular in~~ This energy has specific terms of duration and/or amplitude, and ~~which when~~  
the electric motor, ~~when~~ is off and is in its capacity as an electroacoustic transducer, this  
10 energy emits at least in part in the form of audible signals.

The use of an electric motor as a sound transmitter or electroacoustic transducer when  
off ~~as disclosed in the invention~~ obviates the need to provide additional, separate components  
such as loudspeakers or the like, ~~because the~~ The electric motor, which is present in any case  
15 for drive purposes, can be operated during off-periods as an electroacoustic transducer under  
suitable control from the control stage. Furthermore, the electric motor used in the appliance  
is ~~in any case~~ mechanically connected with to the appliance or the appliance housing, ~~thus~~  
~~enabling~~ Thus, sound ~~to be~~ is emitted readily via this connection ~~of the motor to the~~  
~~appliance or appliance housing~~ from the interior of the appliance via through the appliance or  
20 appliance housing to the environment, and in a volume ~~well perceptible~~ easily perceived by  
the user. ~~In times when~~ When the electric motor is off and not called on to supply any  
mechanical drive energy, the electric motor is suitably controlled to operate as a sound  
transmitter or loudspeaker. ~~Within the scope of the present invention~~ Electric motors here  
are understood to be a means for converting electric energy into mechanical energy, for  
25 example drive energy.

It is an advantage for the electric motor to be constructed as a low-duty motor, for  
example, as a direct-current motor comprising a rotor and a stator, ~~The invention is not~~  
restricted, however, to such motors but can also find application, individually adapted in  
30 accordance with the given conditions, in asynchronous, synchronous, stepping and reluctance  
motors.

~~According to a variant of the embodiment of the invention~~In some embodiments, the control stage feeds analog signals to the electric motor. In ~~this variant~~ these embodiments, the analog signal, for example a voltage signal, contains the spectrum of the audible signals  
5 to be emitted by the electric motor.

~~Further,~~ In further embodiments, the analog signal may also contain frequency mixes, for example to generate audible speech or music signals.

10 Advantageously, the analog signal is a unipolar signal, enabling the electronic components as well as the energy supply, which is, for example, a storage battery or the like, to be constructed with utmost ease.

It is also possible, however, for the analog signal to be a bipolar signal. A bipolar  
15 control is slightly more elaborate in its electronic outlay but it enables far higher control amplitudes and hence acoustic power because the average of the bipolar signal is invariably zero.

~~According to~~ In a further embodiment of the invention, ~~it is also possible for the~~  
20 control stage ~~to feed~~ feeds digital signals to the electric motor. In this embodiment the digital signals preferably are constructed ~~in particular~~ as pulse-duration--modulated signals and preferably have in particular an essentially constant maximum amplitude.

The fundamental frequency of the digital signal essentially represents the pitch of the  
25 audible signal, disregarding the overtones.

It is particularly important for the embodiments of the invention that the time average of the signal lie below a signal threshold value that causes the electric motor to start up.

30 In this connection it has been shown that the signal threshold value varies in response to the signal frequency and in particular that it rises with the frequency. Hence it



is possible to control the electric motor at higher frequencies with higher signal amplitudes, thus resulting in better acoustic power.

5 The fact that the signal has no frequencies below a frequency threshold value that causes the electric motor to start up is ~~also an another~~ advantage that should be taken into account.

According to a further advantageous aspect of the invention, provision is made for a time delay between the instant the electric motor is shut off as a driving  
10 mechanism and the instant it is operated as an electroacoustic transducer.

Advantageously, the electric motor has a brake, for example a mechanical brake with a constant braking torque, or a start-up brake with a braking torque that decreases after the motor starts up.

15 In various cases of application, it ~~likewise proves to be~~ is an advantage for the electric motor to have a device for positioning the rotor in a defined position of rest.

To optimize efficiency in terms of acoustic power output, the electric motor is  
20 equipped according to a further embodiment of the invention with an accordingly adapted motor housing or motor housing material.

Provision is made preferably for mechanical elements such as ribs, hard parts or the like between the appliance or appliance housing and the electric motor, which ~~serve to~~  
25 optimize the acoustic emission of the appliance or appliance housing.

The control stage is preferably formed by a driving stage that is connected to the energy supply on ~~the one~~ side and to a signal generator on the other side and, where applicable, to additional electronic components.

30 The appliance of the invention is preferably used as a drive, for example for a

toothbrush, an oral irrigator, a shaving system, a household machine, an office machine or the like. Application of the invention is generally not limited to certain types of appliance or appliance applications but is suitable for all appliances that have an electric drive motor and a control device for the electric motor's energy supply.

5

Further advantages, features, application possibilities and aspects of the present invention will become apparent from the subsequent description of embodiments. In this context, all features described and/or depicted, whether individually or in any reasonable combination, constitute the object of this invention irrespective of their summary in the  
10 claims or the cross references of the latter.

#### Brief Description of Drawings

~~In the drawings,~~

15 FIG. 1 is a schematic representation in block diagram form of a first embodiment of an appliance according to the invention;

FIG. 2 shows an embodiment of the control using unipolar analog signals of a frequency of 1 kHz and 0.66 kHz;

20

FIG. 3 shows an embodiment of the control using bipolar analog signals of a frequency of 1 kHz and 0.66 kHz;

FIG. 4 shows an embodiment of the control using pulse-duration-modulated digital  
25 signals of a fundamental frequency of 1 kHz and 0.66 kHz; and

FIG. 5 shows an embodiment of the frequency-dependent rise of the signal threshold value.

30

#### Detailed Description

FIG. 1 shows an appliance 10 with a driving mechanism constructed as an electric

motor 12 and with a control stage 14 for the energy supply 16 of the electric motor 12. During off-periods of the electric motor 12, the control stage 14 supplies it with energy that ~~is adapted in particular in~~ has specific terms of duration and/or amplitude such that the electric motor 12, acting as an electroacoustic transducer when off, emits at least part of this  
5 energy in the form of audible signals. The electric motor 12 can be constructed as a low-duty motor with a rotor and a stator, for example as a direct-current motor or, alternatively, as an asynchronous, synchronous, stepping or reluctance motor or the like. The control stage 14 is formed by a driving stage 36 that is connected to the energy supply 16 on the one side and to a signal generator 38 on the other side and, where applicable, to additional electronic  
10 components. When the electric motor 12 is required for drive purposes the control stage 14 ~~sees to it that~~ supplies the electric motor 12 ~~is accordingly supplied~~ with energy so that ~~it~~ the electric motor 12 is set in motion, delivering mechanical drive energy, for example.

According to the embodiment of FIG. 2, the electric motor 12 is controlled by  
15 unipolar signals 18 that have a frequency of about 1 kHz and 0.66 kHz.

According to FIG. 3 the electric motor 12 is controlled by bipolar signals 20 of a frequency corresponding to that of FIG. 2.

20 FIG. 4 shows a control of the electric motor 12 using pulse-duration-modulated signals 22, the fundamental frequency of these signals again lying at around 1 kHz and 0.66 kHz.

In all the embodiments of FIGS. 2, 3 and 4, the time average 24 of the signals 18, 20,  
25 22 lies below a signal threshold value 26 that causes the electric motor 12 to start up.

In FIG. 5 the signal threshold value 26 as a function of the signal frequency is plotted for a special embodiment of an electric toothbrush equipped with a low-duty direct-current motor. Clearly, this signal threshold value 26 rises as the frequencies grow. It will be  
30 understood, of course, that the dependence of the signal threshold value 26 on the frequency differs very greatly from one application to the next.

A series of advantages, potential applications and embodiments will be described in more detail in the following:

5        The invention ~~is characterized on the whole by~~features a novel application of an electric motor 12, particularly a low-duty motor, in which the electric motor 12 is used as an electroacoustic transducer by a special control when off. This use entails~~involves~~ supplying an electric motor when off with energy via a suitable electronic control stage 14 such that the electric motor 12 does not start up or just about does not start up, the energy being processed  
10 over time so that at least part of this energy is delivered by the electric motor 12 in audible form. The higher the effective value of the energy supplied to the electric motor, the higher the acoustic power output. Such a motor control can be effected either by a suitable analog voltage signal, ~~be it whether~~ a unipolar signal 18 or a bipolar signal 20, or ~~else by~~ a pulse-duration-modulated signal with essentially constant voltage via, for example, a driving stage  
15 36 such as a transistor or the like.

The analog signal 18, 20 contains the spectrum of the desired audible signal, whereas with the pulse-duration-modulated signal 22 the fundamental frequency or pulse repeat frequency of the control represents the pitch of the audible signal. With analog control it is  
20 generally possible to generate any frequency mixes, for example speech frequencies, music frequencies or the like, while pulse-duration-modulated control permits, under circumstances, only limited superposition of discrete frequencies.

A unipolar signal 18 is not allowed to exceed, with respect to its time average 24, a signal  
25 threshold value 26 that causes the electric motor 12 to start up. When using a pulse duration modulated signal 22 it is necessary to select the pulse duty factor so that the electric motor 12 is prevented from starting up. Because the~~The~~ start-up characteristic of the electric motor 12 ~~being~~  
is frequency-dependent, the corresponding signal value ~~needs to~~must be set either for the most unfavorable case or, ~~for example, be adapted;~~ in a frequency-dependent manner, for a particular  
30 embodiment according to the frequency response of the signal threshold value 26 of FIG. 6, for example.

The static friction of the mechanical system of the electric motor 12 when off is always greater than the friction while the electric motor is switched on to drive the system to which it is coupled. If maximum controllability is wanted, suitable devices are required during a changeover  
5 from the "motor" to the "acoustic" mode of the electric motor 12 to ensure that the electric motor 12 reliably comes to a standstill, thus producing static friction conditions. This can be ensured by providing for a suitable time delay, for example, which is activated between the motor as a driving mechanism being switched off and its control as an acoustic transducer being switched on.

10 Compared to a control of the electric motor 12 with unipolar signals 12, control of the electric motor 12 by means of bipolar signals 20 permits far higher amplitudes because the average of the bipolar signal invariably adopts zero value.

As such it is important with all types of control of the electric motor 12 in the "acoustic"  
15 mode to ensure that the analog or digital signals do not have any frequencies lying below a frequency threshold value that causes the electric motor 12 to start up. Such a case could occur, for example, when the electric motor 12 is controlled by means of bipolar signals 20 of a frequency of perhaps 1 to 10 Hz. Depending on the system's inertia, the rotor of the electric motor 12 could be set in alternating rotation regardless of the average of the bipolar signal 20  
20 lying at zero. In practice it makes sense, therefore, for the lowest frequencies of the analog and digital signals 18, 20, 22 not to be lower than about 50 Hz or about 100 Hz. The lowest frequency is also defined by the inert mass of the rotor and can therefore vary with the type of electric motor 12 used. The smaller the inert mass of the rotor, the higher the lower limit frequency.

25 ~~Higher signal amplitudes can be selected with a~~ A bipolar control affords higher signal amplitudes than with a unipolar control, ~~which means that~~ Thus, it is also possible to set a correspondingly higher value for the sound pressure with a bipolar control. The only limiting factor is the current carrying capacity of the commutators and the maximum power loss in the rotor windings.

30

Unwanted starting up of the motor always occurs when the average torque applied by

Tracked Changes

the control exceeds the starting torque of the appliance 10, ~~that is, the motor plus mechanical systems coupled thereto.~~ If the maximal loudness possible in the particular case of application is insufficient, the starting torque of the electric motor 12 can be increased by suitable mechanical devices. In this context, it is possible, ~~for example,~~ for the electric motor 12 to be used with a  
5 brake 28, for example, a mechanical brake with constant braking torque or ~~with a start-up brake~~ with a braking torque that decreases after start-up.

~~Considering that, as a rule,~~ The electric motors 12 are not constructed with perfect rotational symmetry as regards their windings and magnetically effective components, Thus,  
10 the type and amplitude of the forces resulting from the signals 18, 20, 22, and hence the amplitude and tone color of the audible signals supplied by the electric motor 12 when off, can also depend ~~in particular~~ on the angular position of the rotor relative to the stator. To ensure a certain reproducibility in this regard, suitable devices can be provided to ensure that the motor always comes to rest in a defined rotor position relative to the stator. For example, a device 30  
15 can be provided for the defined positioning of the rotor when at rest.

Preventing the electric motor 12 from starting up in the "acoustic" mode as the result of the control when off is ~~likewise a major aspect~~ also is important ~~when the present invention is~~  
applied to other types of motor including, for example, asynchronous, synchronous, stepping and  
20 reluctance motors. Therefore the driving winding packs can equally receive any energy input modulated with the audible signal, provided the current and power loss loading of the components involved is not exceeded.

To increase efficiency and hence the maximum possible acoustic power output, the  
25 electric motor 12 can itself be optimized by suitable provisions including, for example, an adapted motor housing or motor housing material, for emitting the audible signals.

A further possibility is to use suitable elements 32, such as ribs, hard parts or the like, to optimize the acoustic coupling between the appliance 10 or the appliance housing  
30 34 and the electric motor 12 or the motor housing.

Tracked Changes

~~While the~~ The mode of operation of the control of the invention ~~has not been analyzed down to the last detail, it can~~ generally be described ~~with reference to plausibility considerations~~ as follows:

5           The modulated currents flowing in the driving windings of the motor as the result of the control with the signals 18, 20, 22 during the off-period of the electric motor 12 generate magnetic fields that are modulated with the useful audible signal. In various ways, for example via the forces of magnetic attraction of current-carrying conductors, ferromagnetic materials, magnetostriction and the like, these magnetic fields exert radial, tangential and, 10 where applicable, also axial forces on the rotor and housing, leading to deformations or movements in corresponding bearings. The forces acting on the rotor can be transferred, for example via said bearings or other coupling locations, to the motor housing or the appliance 10 or appliance housing 34. The appliance housing 34, oscillating on its surface like a loudspeaker, can pass on these movements in audible form directly to the ambient air or, as 15 structure-borne sound, to other structures that emit the signal in generally amplified form to the air by the resonant body principle. The geometry of the electric motor 12 itself and of the components coupled thereto such as the appliance housing 34 or the like exert through their natural resonances a filtering effect on the spectrum of the signal and hence generally lead to a limited frequency range in the form of a bandpass in which audible signals can be 20 meaningfully emitted from the appliance 10.

~~In a concrete embodiment in which~~ One embodiment of the appliance 10 is constructed as a handpiece of an electric toothbrush, ~~to which handpiece a~~ A toothbrush drivable by the electric motor 12 is attachable to the handpiece, the electric motor 12 25 constructed as a low-duty direct-current motor ~~is used in certain operating modes to output various tunes. Conventional toothbrushes of this type are described in EP 0 850 027 A1, for example, which is incorporated in the disclosure content of the present application by~~ express reference by reference herein.

30           Acoustic measurements performed on this individual appliance 10 result in a useful spectrum in the range from about 200 Hz to about 2.5 kHz because the amplitude drop of

**Tracked Changes**

the useful audible signal in this frequency range remains within meaningful limits and the useful signal can be well heard by the user. FIGS. 2 and 3 show the control of the driving stage 36 by means of analog unipolar signals 18 and bipolar signals 20, respectively. By contrast, FIG. 4 shows the control by means of pulse-duration-modulated signals 22. When  
5 control uses pulse-duration-modulated signals 22 of an amplitude corresponding to the motor's rated voltage, pulse duty factors of up to about 20% result, with which the electric motor 12 can be relied upon not to start up as yet. FIG. 5 shows the frequency-dependent rise of the signal threshold value 26, which rises in the mentioned frequency range from about 18% at around 200 Hz to about 23% to 24% at around 2,500 Hz.

10

~~The a~~Appliance 10 ~~of the invention~~ obviates the need to use a sound transmitter because the electric motor 12, which is available in any case to operate appliance components, is itself used as a sound transmitter by means of a special control when off. ~~Among other approaches,~~  
15 ~~†~~This approach also involves utilizing the coupling of the electric motor 12 to the appliance housing 34 ~~in order to be able to emit the sound from the interior of the appliance housing 34 to the environment without requiring any openings or the like needing to be present or provided.~~



**List of References**

- 10 appliance
- 12 electric motor
- 5 14 control stage
- 16 energy supply
- 18 unipolar signal
- 20 bipolar signal
- 22 pulse-duration-modulated signal
- 10 24 time average
- 26 signal threshold value
- 28 brake
- 30 device
- 32 element
- 15 34 appliance housing
- 36 driving stage
- 38 signal generator

**Patent Claims**

1. An appliance (10) of personal use such as a toothbrush, an oral irrigator, a shaver, a kitchen machine, with a driving mechanism constructed as an electric motor (12) and with a control stage (14) for the energy supply (16) to the electric motor (12), characterized in that during off-periods of the electric motor (12) the control stage (14) supplies the electric motor with an energy which is adapted in particular in terms of duration and/or amplitude and which the electric motor (12), when off and in its capacity as an electroacoustic transducer, emits at least in part in the form of audible signals.
2. The appliance (10) as claimed in claim 1, characterized in that the electric motor (12) is constructed as a low-duty motor comprising a rotor and a stator, for example, as a direct-current motor.
3. The appliance (10) as claimed in claim 1, characterized in that the electric motor (12) is constructed as an asynchronous, synchronous, stepping, reluctance motor or the like.
4. The appliance (10) as claimed in any one of the preceding claims, characterized in that the control stage (14) feeds analog signals to the electric motor (12).
5. The appliance (10) as claimed in claim 4, characterized in that the analog signal, for example a voltage signal, contains the spectrum of the audible signals emitted by the electric motor (12).
6. The appliance (10) as claimed in claim 4 or 5, characterized in that the analog signal contains frequency mixes, for example to generate audible speech or music signals.
7. The appliance (10) as claimed in any one of the preceding claims, characterized in that the analog signal is a unipolar signal (18).

8. The appliance (10) as claimed in any one of the claims 1 to 6, characterized in that the analog signal is a bipolar signal (20).

9. The appliance (10) as claimed in any one of the preceding claims 1 to 3, characterized in that the control stage (14) feeds digital signals to the electric motor (12).

10. The appliance (10) as claimed in claim 9, characterized in that the digital signals are pulse-duration-modulated signals (22) and have in particular an essentially constant maximum amplitude.

11. The appliance (10) as claimed in claim 9 or 10, characterized in that the fundamental frequency of the digital signal represents the pitch of the audible signal.

12. The appliance (10) as claimed in any one of the preceding claims, characterized in that the time average (24) of the signal (18, 20, 22) lies below a signal threshold value (26) that causes the electric motor (12) to start up.

13. The appliance (10) as claimed in claim 12, characterized in that the signal threshold value (26) varies in response to the signal frequency and in particular rises with the frequency.

14. The appliance (10) as claimed in any one of the preceding claims, characterized in that the signal (18, 20, 22) has no frequencies below a frequency threshold value that causes the electric motor (12) to start up.

15. The appliance (10) as claimed in any one of the preceding claims, characterized in that provision is made for a time delay between the instant the electric motor (12) is shut off as a driving mechanism and the instant the electric motor (12) is operated as an electroacoustic transducer.

16. The appliance (10) as claimed in any one of the preceding claims, characterized in that the electric motor (12) has a brake (28), for example a mechanical brake with a constant braking torque, or a start-up brake with a braking torque that decreases after the motor starts up.

17. The appliance (10) as claimed in any one of the preceding claims, characterized in that the electric motor (12) has a device (30) for positioning the rotor in a defined position of rest when off.

18. The appliance (10) as claimed in any one of the preceding claims, characterized in that, for optimization of the efficiency in terms of acoustic power output, the electric motor (12) is equipped with an accordingly adapted motor housing or motor housing material.

19. The appliance (10) as claimed in any one of the preceding claims, characterized in that provision is made for ribs, hard parts or similar mechanical elements (32) between the appliance (10) or appliance housing (34) and the electric motor (12) to optimize the acoustic emission of the appliance (10) or appliance housing (34).

20. The appliance (10) as claimed in any one of the preceding claims, characterized in that the control stage (14) is formed by a driving stage (36) that is connected to the energy supply (16) on the one side and to a signal generator (38) on the other side and, where applicable, to additional electronic components.

21. The appliance (10) as claimed in any one of the preceding claims, characterized in that it is constructed as a toothbrush, an oral irrigator, a shaver, a household machine or the like.

**Abstract of the Disclosure**

~~The invention is directed to a~~ An appliance (10) ~~of for~~ for personal use such as a toothbrush, an oral irrigator, a shaver, or a kitchen machine, with a driving mechanism  
5 constructed as an electric motor (12) and ~~with a control stage (14) for the energy supply (16)~~  
that supplies energy to the electric motor (12). ~~During off periods of~~ When the electric  
motor (12), is off, the control stage (14) supplies the electric motor (12) with ~~an energy~~  
~~which is adapted in particular in terms of duration and/or amplitude, and which~~ The electric  
10 motor (12), when off and in its capacity as an electroacoustic transducer, emits ~~at least in~~  
~~part in the form of audible signals~~ at least part of that energy in the form of audible signals.

(FIG. 1)

15

20535264.doc20535264.doc20530733.doc